
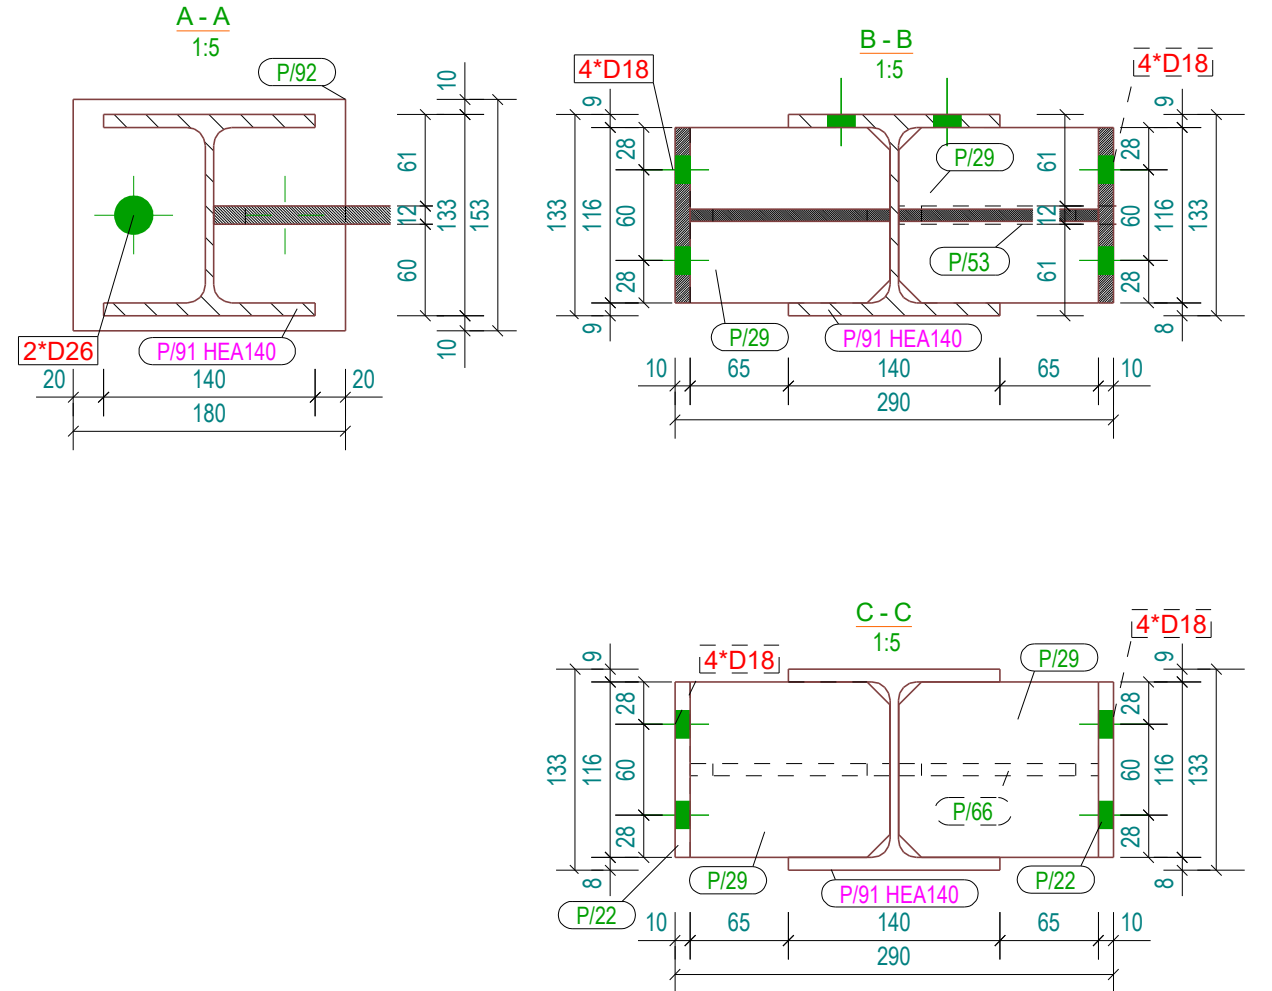
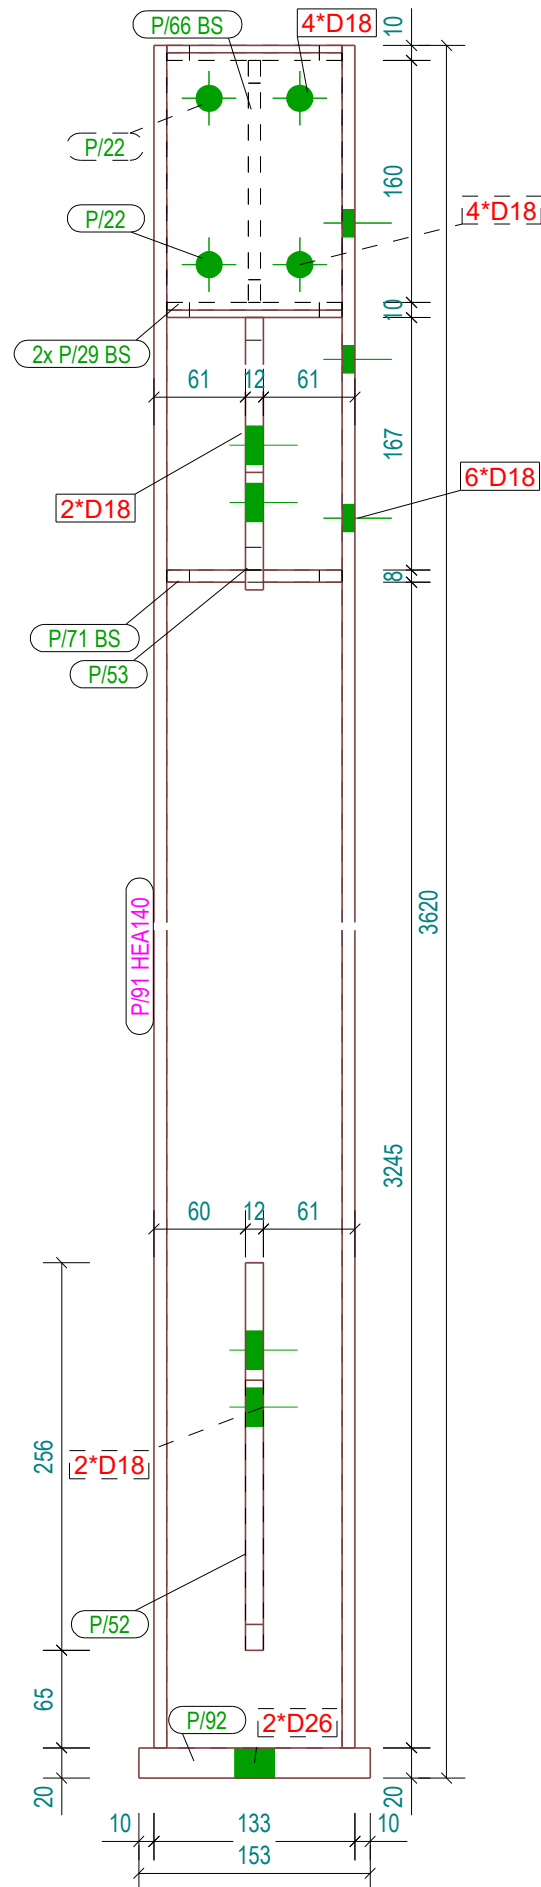


GRID LOCATION	
S/4	3/C

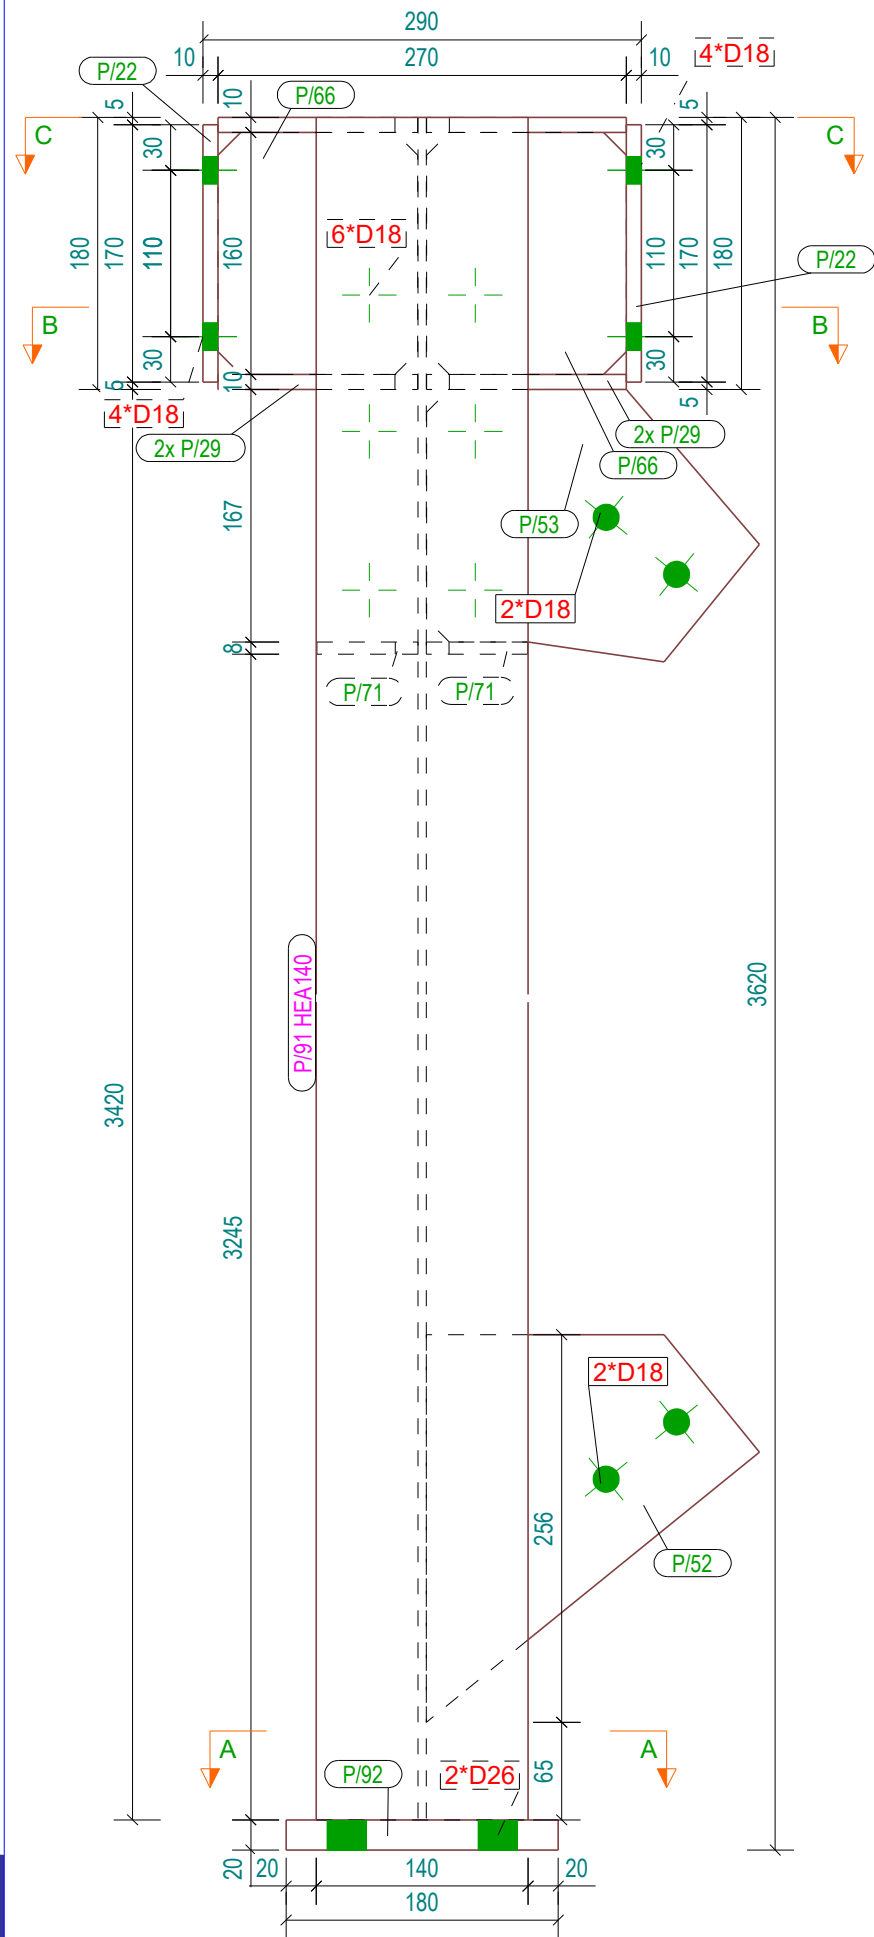

NOTA GENERALA: Toate sudurile se vor realiza pe toata intersectia pieselor ce intra in contact, iar grosimea cordonului de sudura va fi de min. 0,7*Tmin cu exceptia celor specificate in desen.

LISTA MATERIALE PENTRU O BUCATA			S/4				1	Buc. necesar
Poz.	Profil	Material	Buc.	Lungime	Arie vops.	Greutate		
P/91	HEA140	S235JR	1	3600	2.9	88.8		
P/22	PL10*116	S235JR	2	170	0.0	1.5		
P/29	PL10*132	S235JR	4	116	0.0	1.2		
P/52	PL12*199	S235JR	1	284	0.1	3.2		
P/53	PL12*220	S235JR	1	180	0.1	2.9		
P/66	PL8*132	S235JR	2	160	0.0	1.3		
P/71	PL8*67	S235JR	2	116	0.0	0.5		
P/92	PL20*180	S235JR	1	153	0.1	4.3		
Total					3.4	110.6		

Verificator					
Verif/Exp.	Nume	Semnatura	Cerinta	Referat / Expertiza nr./data	
 PROIECTARE CONSTRUCTII CIVILE, INDUSTRIALE SI AGRICOLE		e-mail: office@zergon.ro www.zergon.ro Tel. 0722 170 972 Mosnita Noua, Jud. Timis		Beneficiar	BIG-WELD SRL
				Amplasament:	CF nr. 407785, loc. Tmisoara, jud. Timis, Romania
Specificatie	Nume	Semnatura	Scara:	Titlu proiect:	CONSTRUIRE HANGAR "UNIFAMILIAL"
Sef proiect:	Ing. Florin CIOBOIU				FAZA DTAC-PT
Proiectat:	Ing. Gabriel ILIESCU			Titlu plansa:	05/2024
Desenat:	Ing. Gabriel ILIESCU				Plansa:
				09-2024	Ansamblul [S.4]